




- -
- 21.5" 5-Wire Resistive Touch Screen
- Anodized Aluminum
- IP65 Front Protection
- Compact design
- Made in Spain



IP65 Front Bezel protection, available in Anodized Aluminum or Stainless Steel.  
5-Wire Resistive or Projected Capacitive Multitouch sensor (PCAP).



### Dimensions

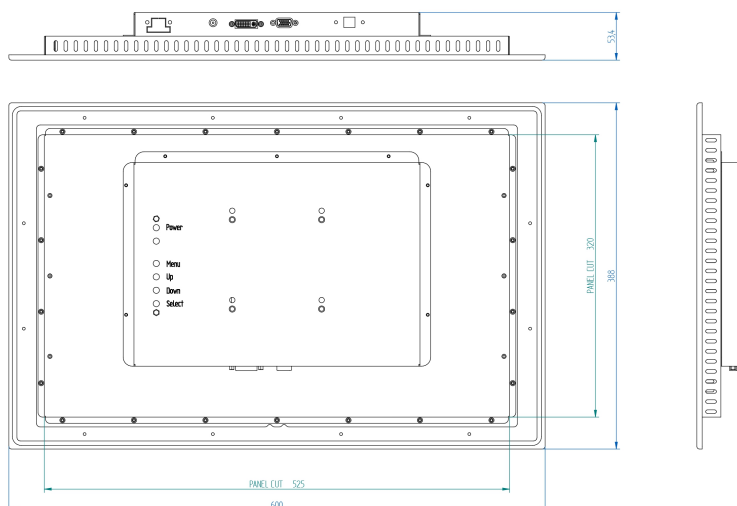

### Specifications

#### Display

|                  |                  |
|------------------|------------------|
| Touch technology | 5 Wire Resistive |
| Inches           | 21,5"            |
| Format           | 16:9             |
| Resolution       | 1920 x 1080      |
| Backlight        | LED              |
| Brightness       | 250 cd/m2        |
| Contrast Ratio   | 5000:1           |
| Viewing Angle    | 178/178          |
| LED Life Time    | 30.000 h         |

#### System

|            |   |
|------------|---|
| CPU        | - |
| Memory     | - |
| Hard Drive | - |
| Graphics   | - |
| Chipset    | - |
| OS         | - |

#### Input / Output

|              |                            |
|--------------|----------------------------|
| USB Ports    | 1 x USB (Touch Controller) |
| Serial Ports | -                          |
| Ethernet     | -                          |
| Video        | 1 x VGA / DVI-D            |
| Audio        | -                          |
| Expansión    | -                          |

#### Mechanical

|            |                     |
|------------|---------------------|
| Dimensions | 600 x 388 x 53,4 mm |
| Weight     | 11 kg               |
| Mounting   | Frontal Wall-Mount  |
| Panel cut  | 525 x 320 mm        |

#### Optionals

|              |                                  |
|--------------|----------------------------------|
| Screen       | High brightness for outdoors use |
| USB Ports    | Optional                         |
| Serial Ports | -                                |
| Modem        | -                                |
| WIFI Module  | -                                |
| Slot PCIe    | -                                |
| Others       | -                                |

#### Protection / Environmental Conditions

|                            |                                    |
|----------------------------|------------------------------------|
| IP & Material              | IP65 Anodized Aluminum Front Bezel |
| °C Operation               | 0° a 60° C                         |
| °C Storage                 | -10° a 70° C                       |
| Humidity (no condensation) | 0% - 95%                           |

#### Power Supply

|                        |                                                         |
|------------------------|---------------------------------------------------------|
| Input Voltage          | 12Vdc/19-24Vdc (External power supply 110-220Vac/12Vdc) |
| Optional Input Voltage | -                                                       |