



- Intel® Core™ i5-6300U 2,40 GHz
- 15" Projected Capacitive Multitouch Display (PCAP)
- Stainless Steel 316L
- IP65 Full Enclosure
- Fanless compact design
- Made in Spain



Intel® Processors



Touch Technology



Efficient Power Consumption



Double Display



IP65 Full Enclosure


CPU boards with latest generation Intel® Processors, fanless, low power consumption and exceptional performance.

Manufactured in 316L Stainless Steel with full IP65 enclosure. Selection and configuration up to five ports, among COM (serial), USB or Ethernet ports, through IP68 connectors.

5-Wire Resistive or Projected Capacitive Multitouch sensor (PCAP).



Dimensions

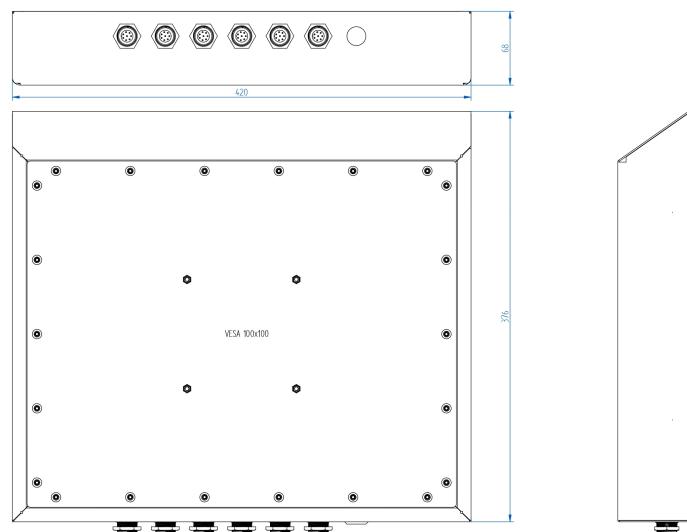

Specifications

| Display | | Mechanical | |
|------------------|---|---------------------------------------|--|
| Touch technology | Projected Capacitive MultiTouch (PCAP) | Dimensions | 420 x 376 x 68 mm |
| Inches | 15" | Weight | 7,2 kg |
| Format | 4:3 | Mounting | VESA 100 x 100, Wall, Bracket, Holder |
| Resolution | 1024 x 768 | Panel cut | - |
| Backlight | LED | Optionals | |
| Brightness | 300 cd/m2 | Screen | High brightness for outdoors use |
| Contrast Ratio | 2000:1 | USB Ports | 2 x USB 2.0 |
| Viewing Angle | 176/176 | Serial Ports | 1 x RS-232 / 3 x RS232/422/485 |
| LED Life Time | 70.000 h | Modem | 3G / LTE + GPS |
| System | | WIFI Module | Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth |
| CPU | Intel® Core™ i5-6300U (6th Generation) 2,40 GHz | Slot PCIe | To Be Consulted |
| Memory | 2Gb Scalable to 16Gb | Others | To Be Consulted |
| Hard Drive | 60/120/240GB SSD. 500GB/1TB SATA. | Protection / Environmental Conditions | |
| Graphics | Intel® HD Graphics 520 | IP & Material | Full IP65 Stainless Steel 316L |
| Chipset | i5-6300U Onboard (SoC) | °C Operation | 0° a 60° C / -20° a 60° C |
| OS | Win7 Pro / Win7 Embedded / Win10 Pro / Win10 IoT Enterprise / Linux | °C Storage | -10° a 70° C / -20° a 85° C |
| Input / Output | | Humidity (no condensation) | 0% a 95% |
| USB Ports | 4x USB 3.0 | Power Supply | |
| Serial Ports | - | Input Voltage | 9-36Vdc (External 110-220V/12Vdc) |
| Ethernet | 2 x Intel® Giga Ethernet | Optional Input Voltage | - |
| Video | 1 x DVI-I / 1 x DP | | |
| Audio | - | | |
| Expansión | 1 x mSATA (Half Size) / 1 x Mini Card Slot | | |