



- Intel® Core™ i5-6300U 2,40 GHz
- 21,5" Projected Capacitive Multitouch Display (PCAP)
- Stainless Steel 316L
- IP65 Full Enclosure
- Fanless compact design
- Made in Spain



Intel®
Processors



Touch
Technology



Efficient Power
Consumption



Double
Display



IP65 Full
Enclosure


CPU boards with latest generation Intel® Processors, fanless, low power consumption and exceptional performance.

Manufactured in 316L Stainless Steel with full IP65 enclosure. Selection and configuration up to five ports, among COM (serial), USB or Ethernet ports, through IP68 connectors.

5-Wire Resistive or Projected Capacitive Multitouch sensor (PCAP).



Dimensions

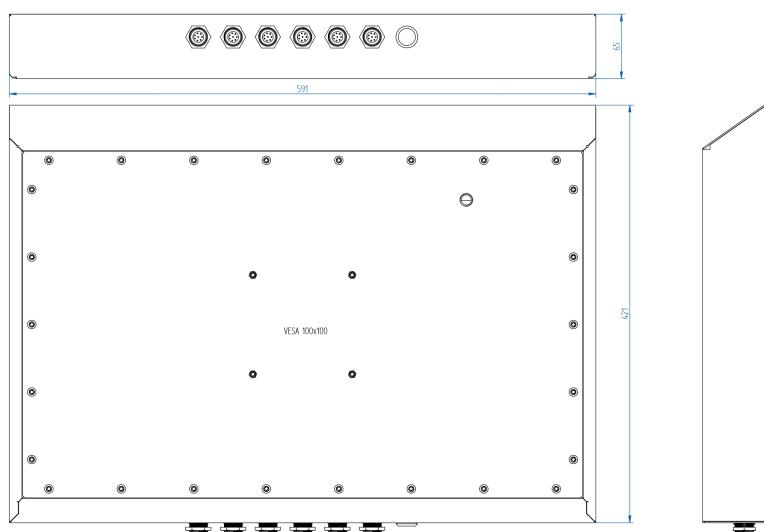

Specifications

Display		Mechanical	
Touch technology	Projected Capacitive MultiTouch (PCAP)	Dimensions	591 x 421 x 65 mm
Inches	21,5"	Weight	14,5 kg
Format	16:9	Mounting	VESA 100 x 100, Wall, Bracket, Holder
Resolution	1920 x 1080	Panel cut	-
Backlight	LED	Optionals	
Brightness	300 cd/m2	USB Ports	2 x USB 2.0
Contrast Ratio	5000:1	Serial Ports	1 x RS-232 / 3 x RS232/422/485
Viewing Angle	178/178	Modem	3G / LTE + GPS
LED Life Time	50.000 h	WIFI Module	Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth
System		Slot PCIe	To Be Consulted
CPU	Intel® Core™ i5-6300U (6th Generation) 2,40 GHz	Others	To Be Consulted
Memory	2Gb Scalable to 16Gb	Protection / Environmental Conditions	
Hard Drive	60/120/240GB SSD. 500GB/1TB SATA.	IP & Material	Full IP65 Stainless Steel 316L
Graphics	Intel® HD Graphics 520	°C Operation	0° a 60° C / -20° a 60° C
Chipset	i5-6300U Onboard (SoC)	°C Storage	-10° a 70° C / -20° a 85° C
OS	Win7 Pro / Win7 Embedded / Win10 Pro / Win10 IoT Enterprise / Linux	Humidity (no condensation)	0% a 95%
Input / Output			
USB Ports	4x USB 3.0	Power Supply	
Serial Ports	-	Input Voltage	9-36Vdc (External 110-220V/12Vdc)
Ethernet	2 x Intel® Giga Ethernet	Optional Input Voltage	-
Video	1 x DVI-I / 1 x DP		
Audio	-		
Expansión	1 x mSATA (Half Size) / 1 x Mini Card Slot		