



- Intel® Celeron™ J3455 Quad Core 2,30 GHz
- 15" 5-Wire Resistive Touch Screen
- Stainless Steel 316L
- IP65 Full Enclosure
- Fanless compact design
- Made in Spain



Intel®  
Processors



Touch  
Technology



Efficient Power  
Consumption



Double  
Display



IP65 Full  
Enclosure


CPU boards with latest generation Intel® Processors, fanless, low power consumption and exceptional performance.

Manufactured in 316L Stainless Steel with full IP65 enclosure. Selection and configuration up to five ports, among COM (serial), USB or Ethernet ports, through IP68 connectors.

5-Wire Resistive or Projected Capacitive Multitouch sensor (PCAP).



### Dimensions

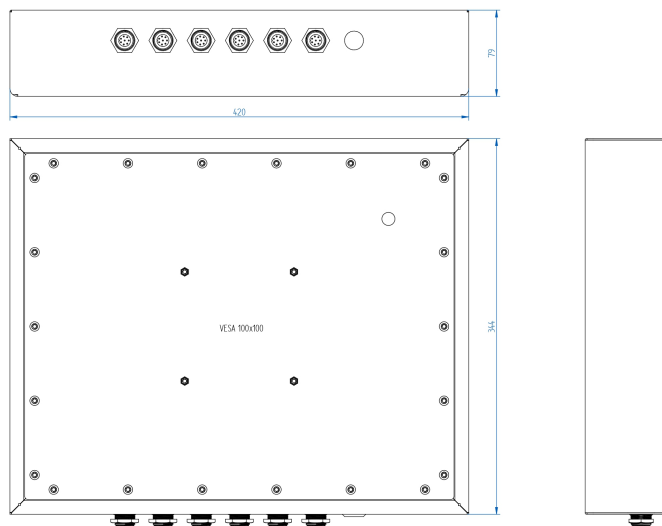

### Specifications

#### Display

Touch technology	5 Wire Resistive
Inches	15"
Format	4:3
Resolution	1024 x 768
Backlight	LED
Brightness	300 cd/m2
Contrast Ratio	2000:1
Viewing Angle	176/176
LED Life Time	70.000 h

#### System

CPU	Intel® Celeron™ J3455 Quad Core 2,30 GHz
Memory	DDR3L 2Gb Scalable to 8Gb
Hard Drive	60/120/240GB SSD. 500GB/1TB SATA.
Graphics	Intel® HD Graphics
Chipset	J3455 Onboard (SoC)
OS	Win10 Pro / Win10 IoT Enterprise / Linux

#### Input / Ouput

USB Ports	4 x USB 3.0
Serial Ports	-
Ethernet	1 x Realtek Giga Ethernet
Video	2 x HDMI
Audio	1 x Audio output
Expansión	1 x Mini-PCle / 1 x M.2(2242/2260) for SSD

#### Mechanical

Dimensions	420 x 344 x 79 mm
Weight	7,2 kg
Mounting	VESA 100 x 100, Wall, Bracket, Holder
Panel cut	-

#### Optionals

Screen	High brightness for outdoors use
USB Ports	2 x USB 2.0
Serial Ports	2 x RS-232/422/485
Modem	3G / LTE + GPS
WIFI Module	Wifi 2,4GHz / Wifi 2,4GHz i 5GHz + Bluetooth
Slot PCIe	To Be Consulted
Others	To Be Consulted

#### Protection / Environmental Conditions

IP & Material	Full IP65 Stainless Steel 316L
°C Operation	0° a 60° C / -20° a 60° C
°C Storage	-10° a 70° C / -20° a 85° C
Humidity (no condensation)	0% a 95%

#### Power Supply

Input Voltage	12Vdc (External power supply 110-220Vac/12Vdc)
Optional Input Voltage	24Vdc